

Diesel Forklift

Internal-combustion counterbalance trucks from 1.5 to 5.0 t, for yards, ports and heavy outdoor duty.

8

Models

CE

Machinery directive

ISO 9001

Quality management

2009

Founded


DIESEL FORKLIFT

CPC(D)15

1.5 t rated



Rated capacity	1.5 t
Lift height	3,000 mm standard; 4,500 / 6,000 mm optional
Engine	Xinchai C490BPG, 36.8 kW, Stage V
Turning Radius	2485 mm
Service Weight	3880 kg
Length	3885 mm to fork face
Width	1230 mm
Tyre	Pneumatic 7.00-12 (front) / 6.00-9 (rear)

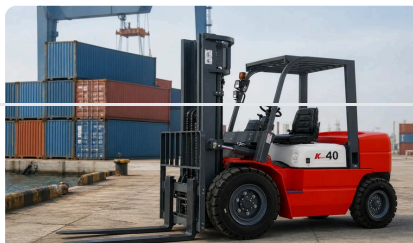


DIESEL FORKLIFT

CPC(D)20

2.0 t rated



Rated capacity	2.0 t
Lift height	3,000 mm standard; 4,500 / 6,000 mm optional
Engine	Xinchai C490BPG, 36.8 kW, Stage V
Turning Radius	2580 mm
Service Weight	4290 kg
Length	3980 mm to fork face
Width	1230 mm
Tyre	Pneumatic 7.00-12 (front) / 6.00-9 (rear)

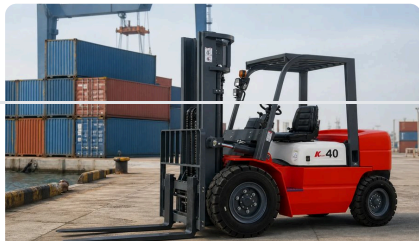


DIESEL FORKLIFT

CPC(D)25

2.5 t rated



Rated capacity	2.5 t
Lift height	3,000 mm standard; 4,500 / 6,000 mm optional
Engine	Xinchai C490BPG, 36.8 kW, Stage V
Turning Radius	2675 mm
Service Weight	4700 kg
Length	4075 mm to fork face
Width	1230 mm
Tyre	Pneumatic 7.00-12 (front) / 6.00-9 (rear)

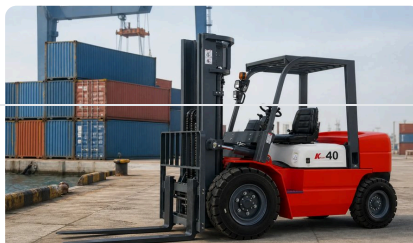


DIESEL FORKLIFT

CPC(D)30

3.0 t rated



Rated capacity	3.0 t
Lift height	3,000 mm standard; 4,500 / 6,000 mm optional
Engine	Xinchai C490BPG, 36.8 kW, Stage V
Turning Radius	2770 mm
Service Weight	5110 kg
Length	4170 mm to fork face
Width	1230 mm
Tyre	Pneumatic 7.00-12 (front) / 6.00-9 (rear)

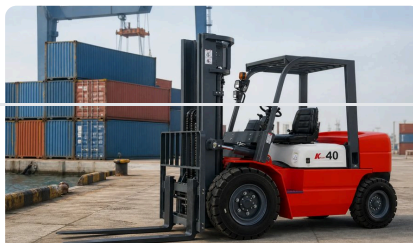


DIESEL FORKLIFT

CPC(D)35

3.5 t rated



Rated capacity	3.5 t
Lift height	3,000 mm standard; 4,500 / 6,000 mm optional
Engine	Yunnei 4JB1, 45 kW, Stage V
Turning Radius	2865 mm
Service Weight	5520 kg
Length	4265 mm to fork face
Width	1330 mm
Tyre	Pneumatic 8.25-15 (front) / 7.00-12 (rear)

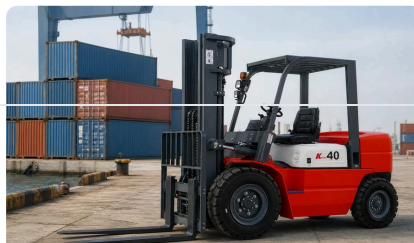


DIESEL FORKLIFT

CPC(D)40Q

3.8 t rated



Rated capacity	3.8 t
Lift height	3,000 mm standard; 4,500 / 6,000 mm optional
Engine	Yunnei 4JB1, 45 kW, Stage V
Turning Radius	2922 mm
Service Weight	5766 kg
Length	4322 mm to fork face
Width	1330 mm
Tyre	Pneumatic 8.25-15 (front) / 7.00-12 (rear)

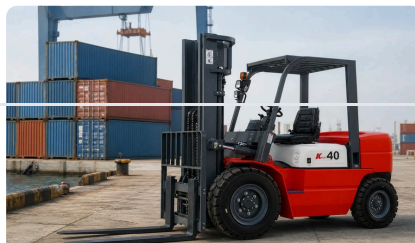


DIESEL FORKLIFT

CPC(D)40

4.0 t rated



Rated capacity	4.0 t
Lift height	3,000 mm standard; 4,500 / 6,000 mm optional
Engine	Yunnei 4JB1, 45 kW, Stage V
Turning Radius	2960 mm
Service Weight	5930 kg
Length	4360 mm to fork face
Width	1330 mm
Tyre	Pneumatic 8.25-15 (front) / 7.00-12 (rear)

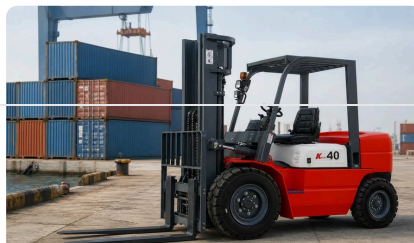


DIESEL FORKLIFT

CPC(D)50

5.0 t rated



Rated capacity	5.0 t
Lift height	3,000 mm standard; 4,500 / 6,000 mm optional
Engine	Yunnei 4JB1T, 55 kW, Stage V
Turning Radius	3150 mm
Service Weight	6750 kg
Length	4550 mm to fork face
Width	1330 mm
Tyre	Pneumatic 8.25-15 (front) / 7.00-12 (rear)

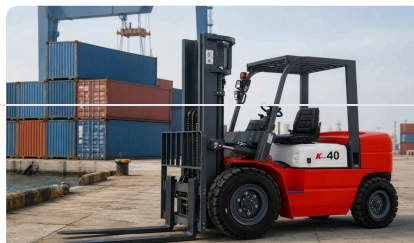

MANUFACTURER

Who builds these machines

WyllBell is the export brand of Shandong Mingsheng Machinery Group, founded in 2009.

Frames, masts and counterweights are fabricated in-house; engines, hydraulics and controllers come from named suppliers, disclosed on request.

Machines are shipped to more than 150 countries. Every unit is load-tested before packing, and a test record travels with the machine.

Founded	2009
Certification	CE (machinery directive), ISO 9001
Export markets	150+ countries and regions
OEM / ODM	Available: paint, decals, nameplate, packaging
Spare parts	Wear parts stocked for every model sold
Factory visit	Welcome; pickup from Jinan or Qingdao arranged

Specifications are the standard build and may be changed at order. Figures are subject to confirmation on the order acknowledgement.