

Electric Forklift

Battery counterbalance trucks from 0.5 to 5.0 t, for warehouses, cold stores and indoor production.

11

Models

CE

Machinery directive

ISO 9001

Quality management

2009

Founded

ELECTRIC FORKLIFT

MS-05

0.5 t rated



Rated capacity	0.5 t
Lift height	3,000 mm standard; 4,500 / 6,000 mm optional
Battery	48 V / 400 Ah lead-acid or 48 V 280 Ah Li-ion
Turning Radius	1715 mm
Service Weight	2240 kg
Length	3145 mm to fork face
Width	1140 mm
Tyre	Solid rubber 6.50-10 (front) / 5.00-8 (rear)



ELECTRIC FORKLIFT

MS-08

0.8 t rated



Rated capacity	0.8 t
Lift height	3,000 mm standard; 4,500 / 6,000 mm optional
Battery	48 V / 400 Ah lead-acid or 48 V 280 Ah Li-ion
Turning Radius	1772 mm
Service Weight	2474 kg
Length	3202 mm to fork face
Width	1140 mm
Tyre	Solid rubber 6.50-10 (front) / 5.00-8 (rear)




ELECTRIC FORKLIFT

MS-10

1.0 t rated



Rated capacity	1.0 t
Lift height	3,000 mm standard; 4,500 / 6,000 mm optional
Battery	48 V / 400 Ah lead-acid or 48 V 280 Ah Li-ion
Turning Radius	1810 mm
Service Weight	2630 kg
Length	3240 mm to fork face
Width	1140 mm
Tyre	Solid rubber 6.50-10 (front) / 5.00-8 (rear)

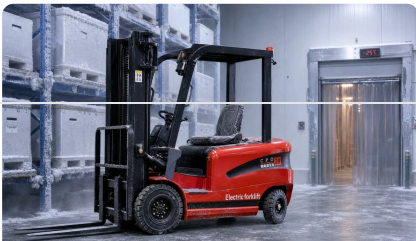

ELECTRIC FORKLIFT

MS-15

1.5 t rated



Rated capacity	1.5 t
Lift height	3,000 mm standard; 4,500 / 6,000 mm optional
Battery	48 V / 400 Ah lead-acid or 48 V 280 Ah Li-ion
Turning Radius	1905 mm
Service Weight	3020 kg
Length	3335 mm to fork face
Width	1140 mm
Tyre	Solid rubber 6.50-10 (front) / 5.00-8 (rear)



ELECTRIC FORKLIFT

MS-15S

1.5 t rated



Rated capacity	1.5 t
Lift height	3,000 mm standard; 4,500 / 6,000 mm optional
Battery	48 V / 400 Ah lead-acid or 48 V 280 Ah Li-ion
Turning Radius	1905 mm
Service Weight	3020 kg
Length	3335 mm to fork face
Width	1140 mm
Tyre	Solid rubber 6.50-10 (front) / 5.00-8 (rear)



ELECTRIC FORKLIFT

MS-20

2.0 t rated



Rated capacity	2.0 t
Lift height	3,000 mm standard; 4,500 / 6,000 mm optional
Battery	48 V / 600 Ah lead-acid or 48 V 400 Ah Li-ion
Turning Radius	2000 mm
Service Weight	3410 kg
Length	3430 mm to fork face
Width	1140 mm
Tyre	Solid rubber 6.50-10 (front) / 5.00-8 (rear)



ELECTRIC FORKLIFT

MS-25

2.5 t rated



Rated capacity	2.5 t
Lift height	3,000 mm standard; 4,500 / 6,000 mm optional
Battery	48 V / 600 Ah lead-acid or 48 V 400 Ah Li-ion
Turning Radius	2095 mm
Service Weight	3800 kg
Length	3525 mm to fork face
Width	1140 mm
Tyre	Solid rubber 28×9-15 (front) / 6.50-10 (rear)




ELECTRIC FORKLIFT

MS-30

3.0 t rated



Rated capacity	3.0 t
Lift height	3,000 mm standard; 4,500 / 6,000 mm optional
Battery	48 V / 600 Ah lead-acid or 48 V 400 Ah Li-ion
Turning Radius	2190 mm
Service Weight	4190 kg
Length	3620 mm to fork face
Width	1140 mm
Tyre	Solid rubber 28×9-15 (front) / 6.50-10 (rear)

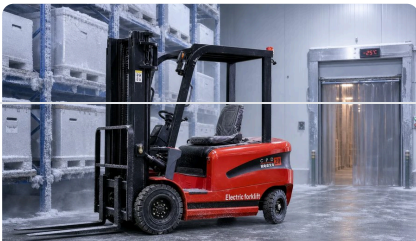

ELECTRIC FORKLIFT

MS-35

3.5 t rated



Rated capacity	3.5 t
Lift height	3,000 mm standard; 4,500 / 6,000 mm optional
Battery	80 V / 500 Ah lead-acid or 80 V 400 Ah Li-ion
Turning Radius	2285 mm
Service Weight	4580 kg
Length	3715 mm to fork face
Width	1230 mm
Tyre	Solid rubber 28×9-15 (front) / 6.50-10 (rear)



ELECTRIC FORKLIFT

MS-40

4.0 t rated



Rated capacity	4.0 t
Lift height	3,000 mm standard; 4,500 / 6,000 mm optional
Battery	80 V / 500 Ah lead-acid or 80 V 400 Ah Li-ion
Turning Radius	2380 mm
Service Weight	4970 kg
Length	3810 mm to fork face
Width	1230 mm
Tyre	Solid rubber 28×9-15 (front) / 6.50-10 (rear)



ELECTRIC FORKLIFT

MS-50

5.0 t rated



Rated capacity	5.0 t
Lift height	3,000 mm standard; 4,500 / 6,000 mm optional
Battery	80 V / 500 Ah lead-acid or 80 V 400 Ah Li-ion
Turning Radius	2570 mm
Service Weight	5750 kg
Length	4000 mm to fork face
Width	1230 mm
Tyre	Solid rubber 28×9-15 (front) / 6.50-10 (rear)



MANUFACTURER

Who builds these machines

WyllBell is the export brand of Shandong Mingsheng Machinery Group, founded in 2009.

Frames, masts and counterweights are fabricated in-house; engines, hydraulics and controllers come from named suppliers, disclosed on request.

Machines are shipped to more than 150 countries. Every unit is load-tested before packing, and a test record travels with the machine.

Founded	2009
Certification	CE (machinery directive), ISO 9001
Export markets	150+ countries and regions
OEM / ODM	Available: paint, decals, nameplate, packaging
Spare parts	Wear parts stocked for every model sold
Factory visit	Welcome; pickup from Jinan or Qingdao arranged

Specifications are the standard build and may be changed at order. Figures are subject to confirmation on the order acknowledgement.